


6-port Unmanaged Industrial PoE Switch

TI-1004GP-2GS

**6-port Unmanaged
Industrial Ethernet
PoE Switch**

*Temperature hardened
and increased surge
protection*

Overview

Teroline's TI-1004GP-2GS is an unmanaged Industrial Ethernet PoE Switch with 4 x 10/100/1000Base-T 802.3af/at PoE ports and 2 x 1000Base-X SFP ports. It is featured with port isolation, 250m long-range transmission, QoS (1-2 ports) and PoE watchdog functions, which can be easily configured by a DIP switch on the top panel.

TI-1004GP-2GS is an ideal and cost-effective solution for industrial automation applications. It's designed with input 44-57VDC, redundant inputs with polarity reverse and over-voltage protection, enclosed in a robust IP40 fan-less housing with DIN-rail installation clamp to support extended operation temperature from -40°C to 75°C as well as enhanced EMI/EMC capability. It is easy and fast to deploy in manufacturing facilities, transportation, oil & gas, chemistry, video surveillance and other various industry automation networks in which the operation condition is harsh and electromagnetic compatibility must be fulfilled.

Key features


- > 2 x 1000Base-X SFP fiber interfaces and 4 x 10/100/1000BASE-T RJ45 PoE LAN interfaces with auto MDI/MDI-X function
- > DIP-switch configuration for Port Isolation, 250m long-range transmission, QoS and PoE watchdog functions
- > Up to 10K Bytes Jumbo Frame support
- > IP40 protection level, Fan-less design, and DIN-rail mounted
- > 4KV surge protection; ESD: 8KV/contact, 15KV/air protection
- > Dual redundant DC44-57V inputs, with reverse & over-voltage protection
- > Operation temperature from -40 to +75°C

Specifications

Interface Specifications	Fiber port:	2 * 1000Base-X SFP
	Copper port:	4 * 10/100/1000Base-T PoE (RJ45)
Power Specifications	Input voltage:	44-57VDC, redundant inputs
	Input current	3A max
	Power consumption	≤ 5W without PoE (full load) ≤ 120W with PoE (full load)
	Power interface	4-pin terminal block
	Reverse polarity protection	Supported
	Over-voltage protection	Supported
LED Indicators	1 – PWR (Green)	Power on indicator
	2 – SYS (Red)	PoE working status indicator
	3 – LNK/ACT (Green)	RJ45 port link up/down/act indicator per port
	4 – SPEED (Yellow)	RJ45 port speed indicator per port
	5 – LNK/ACT (Green)	SFP port link up/down/act indicator per port
DIP Switch	1 – Port Isolation	Port Isolation function on/off
	2 – 250m long-range	Port 1-2 long-range 250m transmission on/off
	3 – QoS (1-2 ports)	Port 1-2 QoS function on/off
	4 – PoE watchdog	Power over Ethernet watchdog on/off
Switching features	Switching capacity	12Gbps
	Packet forwarding rate	17.8Mpps
	MAC address table	2K
	VLAN	4K
	Buffer	3M
	Forwarding delay	< 5us
	Jumbo frame	10K bytes
	Auto MDI/MDIX	Supported
Standards	Watchdog	Supported
	IEEE 802.3	10BASE-T
	IEEE 802.3u	100BASE-TX
	IEEE 802.3ab	1000BASE-T
	IEEE 802.3x	Full-duplex flow control
	IEEE 802.3az	Energy Efficient Ethernet
	IEEE 802.3af	Power over Ethernet
	IEEE 802.3at	Power over Ethernet plus PSE
Environment	Operating temperature	-40°C to +75°C
	Storage temperature	-40°C to +85°C
	Relative humidity	5% to 95% (non-condensing)
	Thermal design	Fan-less, natural heat dissipation
	MTBF	100,000 hours
Standards compliance	Power surge protection	IEC 61000-4-5 Level 3 (4KV/2KV) (8/20us)
	Ethernet port surge protection	IEC 61000-4-5 Level 3 (4KV/2KV) (10/700us)
	DIP	IEC 61000-4-11 Level 3 (10V)
	ESD	IEC 61000-4-2 Level 4 (8K/15K)
	Shock	IEC 60068-2-27

Physical parameters	Free fall	IEC 60068-2-32
	Vibration	IEC 60068-2-6
	Certifications	CE, FCC, RoHS
	Dimensions	30(W)*98(D)*130(H)mm
	Weight	Net weight 0.56KG
	Protection Level	IP40
	Installation Method	DIN-Rail

Physical dimensions

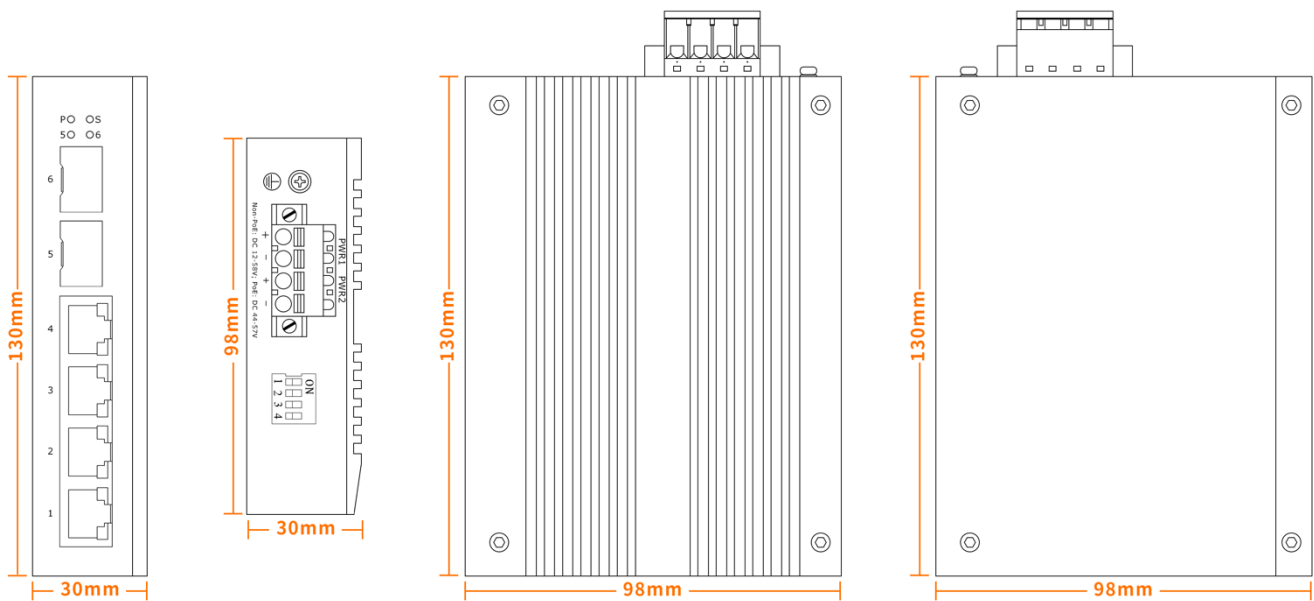

Ordering information

Model	Description
TI-1004GP-2GS	Unmanaged Industrial Ethernet PoE switch, 4x10/100/1000Base-T RJ45 + 2x1000Base-X SFP ports, IEEE 802.3af/at compliant, DC44-57V input, dual redundant power inputs, Din-rail, operation temperature: -40°C to +75°C