


**8-port Unmanaged Industrial PoE Switch**

## TI-1008GP

**8-port Unmanaged Industrial Ethernet PoE Switch**

*Temperature hardened and increased surge protection*

### Overview

Teroline's TI-1008GP is an unmanaged Industrial Ethernet PoE Switch with 8 x 10/100/1000Base-T 802.3af/at PoE ports. It is featured with port isolation, 250m long-range transmission, QoS (1-2 ports) and PoE watchdog functions, which can be easily configured by a DIP switch on the top panel.

TI-1008GP is an ideal and cost-effective solution for industrial automation applications. It's designed with input 44-57VDC, redundant inputs with polarity reverse and over-voltage protection, enclosed in a robust IP40 fan-less housing with DIN-rail installation clamp to support extended operation temperature from -40°C to 75°C as well as enhanced EMI/EMC capability. It is easy and fast to deploy in manufacturing facilities, transportation, oil & gas, chemistry, video surveillance and other various industry automation networks in which the operation condition is harsh and electromagnetic compatibility must be fulfilled.

### Key features


- > 8 x 10/100/1000BASE-T RJ45 PoE interfaces with auto MDI/MDI-X function
- > DIP-switch configuration for Port Isolation, 250m long-range transmission, QoS and PoE watchdog functions
- > IEEE802.3af PoE and IEEE802.3at PoE+ standards
- > Up to 10K Bytes Jumbo Frame support
- > IP40 protection level, Fan-less design, and DIN-rail mounted
- > 4KV surge protection; ESD: 8KV/contact, 15KV/air protection
- > Dual redundant DC44-57V inputs, with reverse & over-voltage protection
- > Operation temperature from -40 to +75°C

## Specifications

<b>Interface Specifications</b>	Fiber port:	None
	Copper port:	8 *10/100/1000Base-T PoE (RJ45)
<b>Power Specifications</b>	Input voltage:	44-57VDC, redundant inputs
	Input current	5.6A max
	Power consumption	≤ 5W without PoE (full load) ≤ 240W with PoE (full load)
	Power interface	4-pin terminal block
	Reverse polarity protection	Supported
	Over-voltage protection	Supported
<b>LED Indicators</b>	1 – PWR (Green)	Power on indicator
	2 – SYS (Red)	PoE working status indicator
	3 – LNK/ACT (Green)	RJ45 port link up/down/act indicator per port
	4 – SPEED (Yellow)	RJ45 port speed indicator per port
<b>DIP Switch</b>	1 – Port Isolation	Port Isolation function on/off
	2 – 250m long-range	Port 1-2 long-range 250m transmission on/off
	3 – QoS (1-2 ports)	Port 1-2 QoS function on/off
	4 – PoE watchdog	Power over Ethernet watchdog on/off
<b>Switching features</b>	Switching capacity	16Gbps
	Packet forwarding rate	23.8Mpps
	MAC address table	16K
	VLAN	4K
	Buffer	2M
	Forwarding delay	< 5us
	Jumbo frame	10K bytes
	Auto MDI/MDIX	Supported
	Watchdog	Supported
<b>Standards</b>	IEEE 802.3	10BASE-T
	IEEE 802.3u	100BASE-TX
	IEEE 802.3ab	1000BASE-T
	IEEE 802.3x	Full-duplex flow control
	IEEE 802.3az	Energy Efficient Ethernet
	IEEE 802.3af	Power over Ethernet
	IEEE 802.3at	Power over Ethernet plus PSE
<b>Environment</b>	Operating temperature	-40°C to +75°C
	Storage temperature	-40°C to +85°C
	Relative humidity	5% to 95% (non-condensing)
	Thermal design	Fan-less, natural heat dissipation
	MTBF	100,000 hours
<b>Standards compliance</b>	Power surge protection	IEC 61000-4-5 Level 3 (4KV/2KV) (8/20us)
	Ethernet port surge protection	IEC 61000-4-5 Level 3 (4KV/2KV) (10/700us)
	DIP	IEC 61000-4-11 Level 3 (10V)
	ESD	IEC 61000-4-2 Level 4 (8K/15K)
	Shock	IEC 60068-2-27
	Free fall	IEC 60068-2-32

Physical parameters	Vibration	IEC 60068-2-6
	Certifications	CE, FCC, RoHS
	Dimensions	48(W)*98(D)*98(H)mm
	Weight	Net weight 0.6KG
	Protection Level	IP40
	Installation Method	DIN-Rail

## Physical dimensions

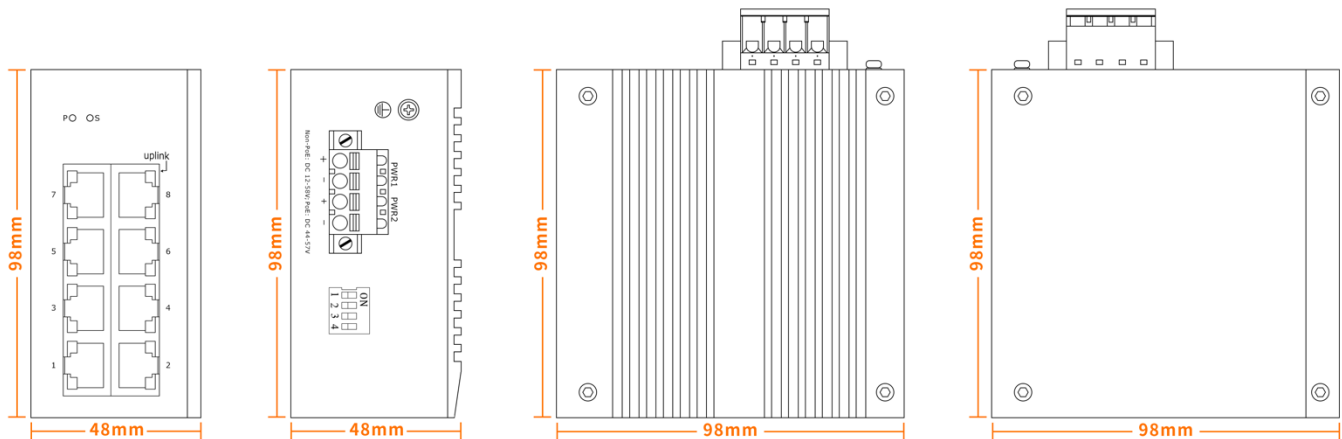

## Ordering information

Model	Description
TI-1008GP	8-port 10/100/1000Base-T unmanaged Industrial Ethernet PoE switch, IEEE 802.3af/at compliant, DC44-57V input, dual redundant power inputs, Din-rail, operation temperature: -40°C to +75°C